

Incompressible Fluid Simulation: A Comparison

YUMENG HE, University of Southern California, USA
HSIN LI, University of Southern California, USA
YUCHEN CHEN, University of Southern California, USA
XU CHEN, University of Southern California, USA

Abstract

Our project is a 2D incompressible fluid simulation implemented in C++ with visualization using OpenGL and GLUT. The main objective is to compare the performance, visual behavior, and numerical characteristics of different fluid simulation methods, including: Grid-based (Stable Fluids), Particle-based (SPH), Particle-In-Cell (PIC), hybrid PIC/FLIP method (PIC/FLIP), Affine Particle-In-Cell (APIC). This simulation provides a visual and algorithmic comparison of each method's strengths and weaknesses.

Index Terms: fluid simulation, incompressible, particle, grid, hybrid

1 Introduction

Fluid simulation is a central topic in physics-based graphics and engineering. Researchers study two broad classes of flow. Compressible fluids—such as smoke, fire, or drifting snow—change density as they move. Incompressible fluids—such as water—preserve volume. Our project narrows its focus to incompressible flow because it underpins many game and film effects.

Scientists have pursued fluid solvers for more than three decades. Early work in the 1990s split along two lines. Grid-based methods stored velocity on fixed cells and solved pressure on a lattice. Particle methods—notably Smoothed Particle Hydrodynamics (SPH)—tracked discrete parcels of mass. Each line had limits: grids diffused small details, while pure particles struggled with volume loss and boundary handling.

Around 2000, hybrid techniques emerged. Particle-In-Cell (PIC) used a grid for forces and particles for advection. FLIP kept the same layout but reduced numerical damping. Material Point Method (MPM) added elastoplastic behavior for snow-like media. Affine Particle-In-Cell (APIC) later improved rotational fidelity by carrying local affine velocity. These methods mix Eulerian and Lagrangian views to balance stability and detail.

Our project builds an interactive framework that implements five representatives: Stable Fluids (grid), SPH (particle), PIC, hybrid PIC/FLIP, and APIC. We run every solver on the same domain, time step, and boundary conditions. We then measure speed, memory use, and visual artifacts. The side-by-side view reveals each method's trade-off between diffusion, noise, and stability, and helps artists choose the right tool for a desired effect.

1.1 Contribution

This project as the follow contributions.

- The codebase supports five fluid solvers behind one interface. Users can swap methods with a single flag.
- The viewer renders density, velocity, and vorticity in real time. It uses GLUT for portability.
- We fix domain size, time step, and boundary conditions across all tests. This isolates algorithmic differences.
- We capture signature phenomena such as diffusion, particle clumping, and energy drift. Screenshots and videos illustrate each effect.

2 Background

Fluid simulation typically relies on solving the Navier-Stokes equations, which describe fluid motion as follows:

$$\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\frac{1}{\rho} \nabla p + \nu \nabla^2 \mathbf{u} + \mathbf{f} \quad (1)$$

$$\nabla \cdot \mathbf{u} = 0 \quad (2)$$

where \mathbf{u} is the velocity field, p is the pressure, ρ is the density, ν is the kinematic viscosity, and \mathbf{f} represents external forces like gravity or user input. The second equation enforces incompressibility.

2.1 Grid-based (Stable Fluids)

Grid-based methods store velocity and pressure fields on a fixed Eulerian grid. The Stable Fluids method proposed by Stam (Stam, 2023) employs an implicit numerical scheme that guarantees stability at the cost of numerical diffusion. This approach involves four primary steps: advection, diffusion, force application, and pressure projection to ensure incompressibility. Although easy to implement and stable, this method diffuses small-scale features rapidly, causing loss of detail.

2.2 Particle-based (SPH)

Smoothed Particle Hydrodynamics (SPH) is a purely Lagrangian, particle-based technique. It represents fluid with discrete particles that carry fluid properties such as density and velocity (Monaghan, 1992). Particle interactions are computed using smoothing kernels, enabling flexible boundary handling and adaptive resolution. However, SPH often struggles with preserving volume and can produce noisy visual artifacts, especially with low particle counts.

2.3 Hybrid Methods

Hybrid approaches blend Eulerian grids and Lagrangian particles, seeking a balance between stability, accuracy, and visual realism. Notable hybrid methods include:

Particle-In-Cell (PIC): PIC (Tskhakaya et al., 2007) transfers velocities from particles to a grid to compute pressure and forces, then advects particles using the grid velocities. It offers stability but introduces significant numerical damping.

Fluid Implicit Particle (FLIP): An improvement over PIC, FLIP (Brackbill et al., 1988) reduces numerical damping by transferring velocity changes, rather than absolute velocities, from grid to particles.

Affine Particle-In-Cell (APIC): APIC (Jiang et al., 2015) further improves rotational and detailed motion preservation by storing affine velocity transformations for each particle, mitigating excessive dissipation seen in PIC/FLIP methods.

Material Point Method (MPM): Extending PIC, MPM (Barndt et al., 2000) simulates elastoplastic and granular materials by integrating material deformation through particle-grid interactions.

Other advanced hybrid variations include:

- **PolyPIC** (Fu et al., 2017), which uses polynomial velocity reconstruction to reduce numerical dissipation.
- **MLS-MPM** (Moving Least Squares MPM) (Hu et al., 2018), enhancing accuracy by employing MLS interpolation.
- **Impulse PIC** (Feng et al., 2022), improving collision handling by explicitly resolving impulses at boundaries.

These hybrid methods significantly advance fluid simulation, enabling realistic visualization with reduced artifacts and increased computational stability.

3 Methods

To accomplish our project goals, we implemented five distinct 2D incompressible fluid simulation methods—Stable Fluids, SPH, PIC, PIC/FLIP, and APIC—using C++ for the core simulation and OpenGL with GLUT for real-time visualization. Each method was developed independently based on its underlying physical principles and algorithmic structure. We focused on observing and comparing the visual behavior and numerical characteristics of each simulation through qualitative analysis. The following sections describe the implementation details and key observations for each method.

Tools and Learning We used C++ for simulation logic and OpenGL with GLUT for real-time visualization across all simulation methods. The Eigen library was employed for efficient matrix operations, particularly for APIC and FLIP methods where affine velocity matrices were involved.

Throughout the project, we learned how to structure particle-grid transfer systems, implement spatial neighborhood queries using a sorting grid, and visualize thousands of particles in real time. We also gained practical experience with parallel programming, numerical debugging, and enforcing boundary conditions on staggered MAC grids.

Course Content Reference We applied key concepts from the course, including hybrid fluid simulation methods (PIC, FLIP, APIC), particle-grid transfers, SPH kernel functions, external forces, and pressure projection. These topics directly guided our simulation and implementation strategy.

3.1 Grid

The first method implemented in our project is the Stable Fluids method introduced by Stam (Stam, 2023). This grid-based Eulerian approach uses a fixed discretized grid to represent fluid properties, such as velocity and density fields. The method ensures unconditional stability at the expense of numerical diffusion, making it robust for real-time applications.

The numerical solver follows four main computational steps:

1. **Add Source:** Introduce external quantities (density, velocity) into the simulation. Each cell’s value is incremented by a

source term scaled by the simulation timestep:

$$x_{i,j} \leftarrow x_{i,j} + \Delta t \cdot s_{i,j}$$

2. **Diffuse:** Account for viscosity by spreading fluid properties across the grid. This step employs iterative Gauss-Seidel or Jacobi methods to solve the diffusion equation implicitly:

$$\frac{x_{i,j}^{t+1} - x_{i,j}^t}{\Delta t} = \nu \nabla^2 x_{i,j}^{t+1}$$

3. **Project:** Enforce incompressibility by adjusting the velocity field to be divergence-free. The divergence is computed, a pressure field is solved via iterative Jacobi relaxation, and then the pressure gradient is subtracted from the velocity:

$$\nabla^2 p = \nabla \cdot \mathbf{u}, \quad \mathbf{u} \leftarrow \mathbf{u} - \nabla p$$

4. **Advect:** Transport fluid properties through the velocity field. Each grid cell is traced backward in time along the velocity field, and bilinear interpolation reconstructs values:

$$x_{i,j}^{t+1} = \mathbf{x}(\mathbf{p} - \Delta t \cdot \mathbf{u}(\mathbf{p}, t), t)$$

Finally, appropriate **Boundary Conditions** are applied after each step: velocity components are inverted at solid boundaries, and scalar fields maintain values by copying adjacent interior cells. These operations are encapsulated within the functions `vel_step()` and `dens_step()`, which are sequentially called in the main simulation loop (`simulation()`).

3.2 Particle

We used a particle fluid simulation method developed by Monaghan (Monaghan, 1992), called Smoothed Particle Hydrodynamics (SPH). Our code focused on modeling using SPH formulations with fluid forces such as pressure and viscosity. SPH is an interpolation method that evaluates field quantities of each particle based on its local neighborhood using radial symmetrical smoothing kernels.

3.2.1 Algorithm The core steps of the SPH particle fluid simulation is summarized in Algorithm 1.

3.3 PIC

The Particle-In-Cell (PIC) method uses both particles and grids for fluid simulation. Each simulation step involves five primary phases:

1. **Transfer to Grid:** Particle velocities are transferred to nearby grid cells using B-spline weighting functions. The compact quadratic B-spline kernel used is:

$$w(r) = \begin{cases} 0.75 - r^2, & 0 \leq r < 0.5 \\ 0.5 \cdot (1.5 - r)^2, & 0.5 \leq r < 1.5 \\ 0, & \text{otherwise} \end{cases} \quad (3)$$

2. **Apply Gravity:** Gravity force is applied directly to vertical grid velocities. Grid velocity is updated using:

$$\vec{v}_{i,j,y} = g \cdot \Delta t \quad (4)$$

Algorithm 1 SPH Particle Update Loop

```
1: // Compute density and pressure
2: for each particle  $i$  do
3:   for each neighboring particle  $j$  do
4:     Compute distance
5:     if Within kernel radius then
6:       Add density contribution  $\rho_i = m_j \cdot W(r_{ij}, h)$ 
7:     end if
8:   end for
9:   Compute pressure from density  $P = k_p(\rho - \rho_0)$ 
10: end for
11: // Compute forces on each particle
12: for each particle  $i$  do
13:   Initialize  $f_p \leftarrow 0, f_v \leftarrow 0$ 
14:   for each neighboring particle  $j$  do
15:     Compute distance
16:     if Within kernel radius then
17:       Compute pressure force contribution
18:        $f_p = m_j \cdot \frac{p_i + p_j}{2\rho_j} \cdot \nabla W(r_{ij}, h)$ 
19:       Compute viscosity force contribution
20:        $f_p = m_j \cdot \frac{v_j - v_i}{2\rho_j} \cdot \nabla^2 W(r_{ij}, h)$ 
21:     end if
22:   end for
23:   Compute gravity force contribution  $f_g = G \cdot \frac{m_i}{\rho_i}$ 
24:   Total force on particle  $f_i = f_p + f_v + f_g$ 
25: end for
26: // Integrate velocity and update positions
27: for each particle  $i$  do
28:   Update velocity  $v_i^{t+\Delta t} = v_i^t + \Delta t \cdot \frac{f_i}{m_i}$ 
29:   Update position  $x_i^{t+\Delta t} = x_i^t + \Delta t \cdot v_i^{t+\Delta t}$ 
30:   if position  $x_i$  hits domain boundary then
31:     Dampen velocity
32:     Clamp position to boundary
33:   end if
34: end for
```

3. **Solve Pressure:** The pressure Poisson equation is solved using Jacobi iteration. Initially, divergence is calculated for each grid cell.

$$\nabla \cdot \vec{v}_{i,j} = \frac{v_{i+1,j} \cdot x - v_{i-1,j} \cdot x}{2} + \frac{v_{i,j+1} \cdot y - v_{i,j-1} \cdot y}{2} \quad (5)$$

Then, pressure values are iteratively adjusted to minimize divergence, enforcing incompressibility.

$$p_{i,j}^{(k+1)} = \frac{1}{N} \left(\sum_{\text{fluid neighbors}} p^{(k)} - \nabla \cdot \vec{v}_{i,j} \right) \quad (6)$$

where N is the number of neighboring fluid cells. The velocity field is updated by subtracting the pressure gradient.

$$\vec{v}_{i,j} \cdot x = \frac{p_{i+1,j} - p_{i-1,j}}{2}, \quad \vec{v}_{i,j} \cdot y = \frac{p_{i,j+1} - p_{i,j-1}}{2} \quad (7)$$

4. **Transfer Back to Particles:** Updated grid velocities are interpolated back onto particles.

$$\vec{v}_p = \sum_{(i,j)} w_{(i,j) \rightarrow p} \cdot \vec{v}_{i,j} \quad (8)$$

5. **Move Particles:** Particles are advected according to their updated velocities. Boundary conditions are enforced by repositioning particles inside the domain and setting boundary normal velocities to zero.

$$\vec{x}_p += \vec{v}_p \cdot \Delta t \quad (9)$$

3.4 PIC/FLIP Implementation

The PIC/FLIP hybrid method follows a similar pipeline but differs in how particle velocities are updated:

- Before applying gravity, the current grid velocity is stored.
- After solving the pressure, the difference between the new and old grid velocities is computed.
- Particle velocities are updated using a blend of PIC and FLIP:

$$\vec{v}_p^{\text{blended}} = \vec{v}_p^{\text{PIC}} + \alpha(\vec{v}_g^{\text{new}} - \vec{v}_g^{\text{old}}) \quad (10)$$

where a flip_ratio of 0 corresponds to pure PIC, and values approaching 1 resemble FLIP.

- Particles are then advected in the same manner as the PIC method, including boundary handling.

3.5 APIC

To implement the APIC method, we aimed to simulate incompressible fluid behavior with both stability and visual richness. Compared to PIC or FLIP, APIC introduces an affine velocity field per particle to better capture rotational and shear motion, which helps reduce excessive numerical dissipation and jittering effects.

3.5.1 Algorithm The core steps of the APIC method are summarized in Algorithm 2. This method extends the standard PIC approach by introducing an affine velocity matrix for each particle, which allows capturing local rotational and shear motions more accurately.

3.5.2 Intermediate Results and Diagrams We used the Affine Particle-in-Cell (APIC) method to simulate fluid with improved detail and stability. Each particle stores an affine velocity matrix, which allows local rotation and deformation to be preserved during particle-to-grid transfers.

4 Results

Table 1 shows a summary of the comparison of the five fluid simulation methods.

4.1 Grid

We evaluated the performance of the Grid method with a 50x50 grid. Figure 1 shows simulation snapshots of the grid simulation.

The grid-based method is easy to use and stable. It works well for smooth and slow fluid motion. But it also has some limits. Small details like sharp edges are often lost because values are spread out too much. It can also look blurry over time. Since the grid is fixed, it is harder to follow fast-moving or thin parts of the

Algorithm 2 APIC Particle Update Loop

```

1: for each particle  $p$  do ▷ Particle to Grid (P2G)
2:   for each neighboring grid node  $g$  do
3:     Compute weight  $w_{pg}$  and offset  $\mathbf{d} = \mathbf{x}_g - \mathbf{x}_p$ 
4:     Transfer velocity:  $\mathbf{v}_g \leftarrow \mathbf{v}_g + w_{pg} \cdot (\mathbf{v}_p + \mathbf{C}_p \cdot \mathbf{d})$ 
5:     Transfer mass:  $m_g \leftarrow m_g + w_{pg}$ 
6:   end for
7: end for
8: for each grid node  $g$  do ▷ Grid Operations(Add Forces)
9:   if  $m_g > 0$  then
10:    Normalize:  $\mathbf{v}_g \leftarrow \frac{\mathbf{v}_g}{m_g}$ 
11:   end if
12:   Apply gravity:  $\mathbf{v}_g \leftarrow \mathbf{v}_g + \Delta t \cdot \mathbf{g}$ 
13:   Enforce boundary conditions on  $\mathbf{v}_g$ 
14: end for
15: for each particle  $p$  do ▷ Grid to Particle (G2P)
16:   Initialize:  $\mathbf{v}_p \leftarrow 0, \mathbf{C}_p \leftarrow 0$ 
17:   for each neighboring grid node  $g$  do
18:     Compute weight  $w_{pg}$  and offset  $\mathbf{d} = \mathbf{x}_g - \mathbf{x}_p$ 
19:     Interpolate velocity:  $\mathbf{v}_p \leftarrow \mathbf{v}_p + w_{pg} \cdot \mathbf{v}_g$ 
20:     Update affine matrix:  $\mathbf{C}_p \leftarrow \mathbf{C}_p + w_{pg} \cdot \mathbf{v}_g \otimes \mathbf{d}$ 
21:   end for
22:   Update position:  $\mathbf{x}_p \leftarrow \mathbf{x}_p + \Delta t \cdot \mathbf{v}_p$ 
23: end for

```

Table 1
Comparison of Fluid Simulation Methods

Method	Pro	Con
Grid	Fast (real-time) Unconditionally stable	Loss of detail Not physically accurate
Particle	Fast	Limitation of input particle position Particle collapse
PIC	Stable	High numerical dissipation Particles lose energy quickly
PIC/FLIP	More realistic and dynamic motion	Less stable Needs tuning
APIC	Preserves rotation	More complex Slower

fluid. Overall, it is simple and works well for basic fluid scenes, but not good for effects that need high detail.

4.2 Particle

Smoothed Particle Hydrodynamics (SPH) contributed to a fast and scalable fluid simulation. The method is more intuitive, and can be used to model free surfaces, avoiding issues that are present in grid simulation such as grid aliasing. Compared to Stable Fluids, SPH is less stable, and can lead to particle clumping if not stabilized. When initializing the particles, the method is sensitive to particle distribution and requires attention to tuning the smooth-

ing kernels. Figure 2 shows the SPH simulation with 400 particles. It handles free surfaces naturally, but can become unstable and prone to clumping over time.

4.3 PIC and PIC/FLIP

We tested both the PIC and PIC/FLIP methods with the same number of particles. Figure 3 shows how the motion is more dynamic than pure PIC.

The PIC method loses energy fast. Particles move less and quickly fall to the bottom. The PIC/FLIP method keeps more energy. Particles move more and look more natural.

4.4 APIC

The APIC method produced the highest visual quality among all methods tested. By assigning each particle an affine velocity matrix, APIC preserves both rotational motion and local deformation, resulting in smooth and detailed fluid behavior. It outperforms PIC and FLIP in maintaining coherence and reducing numerical dissipation or clumping, especially at higher particle counts.

However, APIC is computationally expensive due to matrix operations and additional interpolation. Performance starts to degrade above 10000 particles, and implementation is more complex compared to PIC or FLIP.

We tested APIC with varying particle counts. Figure 4 shows snapshots at 1000, 4000, and 8000 particles. As particle count increases, the fluid becomes smoother and more realistic. The affine velocity transfer helps preserve structure during motion and reduces artificial viscosity commonly seen in simpler methods.

5 Conclusion

Through this project, we gained hands-on experience implementing a variety of fluid simulation methods, including particle-based (SPH), grid-based (Stable Fluids), and hybrid approaches (PIC, FLIP, and APIC). We deepened our understanding of pressure projection, velocity interpolation, particle-grid transfers, and fluid behavior visualization. On the implementation side, we learned to work with OpenGL and GLUT for real-time rendering, and used the Eigen library for efficient linear algebra operations. We also practiced debugging and tuning numerical simulations, and managing complexity within a modular C++ codebase.

Team Contributions Xu Chen was responsible for the OpenGL-based visualization system and implemented the APIC method. Yumeng He contributed to both the particle system and grid-based simulation components. Irene Li worked on particle and grid simulations. Yuchen Chen implemented the PIC and FLIP methods and also contributed to grid development.

Future Work This project has sparked our interest in computer graphics and physically based animation. In the future, we hope to explore more advanced topics such as 3D fluid simulation, GPU acceleration, and real-time rendering techniques.

Acknowledgements

This project received support during the CSCI580 course, instructed by Professor Carter Slocum at the University of Southern California, USA.

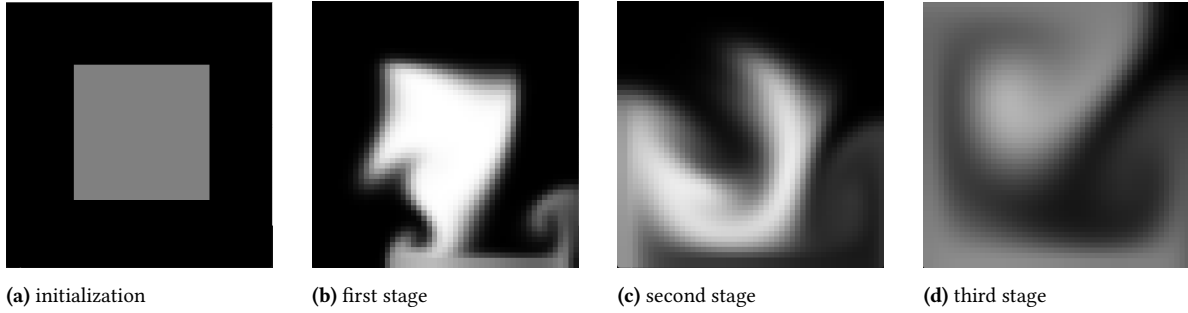


Figure 1. Stages of Stable Fluids simulation (a) shows the initial grid configuration (b)–(d) show different stages of the simulation

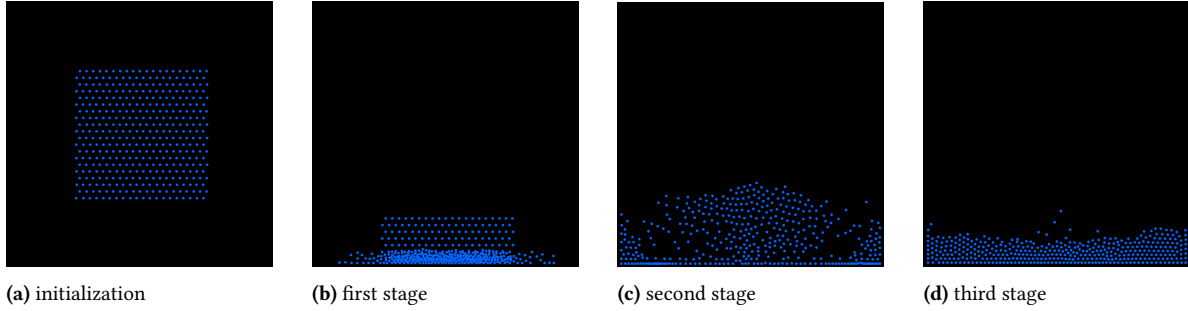


Figure 2. Stages of Smoothed Particle Hydrodynamics simulation with 400 particles. (a) shows the initial particle configuration. (b)–(d) show the fluid evolution over time. SPH handles free-surface motion intuitively, but stability decreases compared to grid-based methods.

References

- Bardenhagen, SG, JU Brackbill, and Deborah Sulsky (2000). “The material-point method for granular materials”. In: *Computer methods in applied mechanics and engineering* 187.3–4, pp. 529–541.
- Brackbill, Jeremiah U, Douglas B Kothe, and Hans M Ruppel (1988). “FLIP: a low-dissipation, particle-in-cell method for fluid flow”. In: *Computer Physics Communications* 48.1, pp. 25–38.
- Feng, Fan et al. (2022). “Impulse fluid simulation”. In: *IEEE Transactions on Visualization and Computer Graphics* 29.6, pp. 3081–3092.
- Fu, Chuyuan et al. (2017). “A polynomial particle-in-cell method”. In: *ACM Transactions on Graphics (TOG)* 36.6, pp. 1–12.
- Hu, Yuanming et al. (2018). “A moving least squares material point method with displacement discontinuity and two-way rigid body coupling”. In: *ACM Transactions on Graphics (TOG)* 37.4, pp. 1–14.
- Jiang, Chenfanfu et al. (2015). “The affine particle-in-cell method”. In: *ACM Transactions on Graphics (TOG)* 34.4, pp. 1–10.
- Monaghan, Joe J (1992). “Smoothed particle hydrodynamics”. In: *Annual review of astronomy and astrophysics. Vol. 30 (A93-25826 09-90)*, p. 543–574. 30, pp. 543–574.
- Stam, Jos (2023). “Stable fluids”. In: *Seminal Graphics Papers: Pushing the Boundaries, Volume 2*, pp. 779–786.
- Tskhakaya, David et al. (2007). “The particle-in-cell method”. In: *Contributions to Plasma Physics* 47.8–9, pp. 563–594.

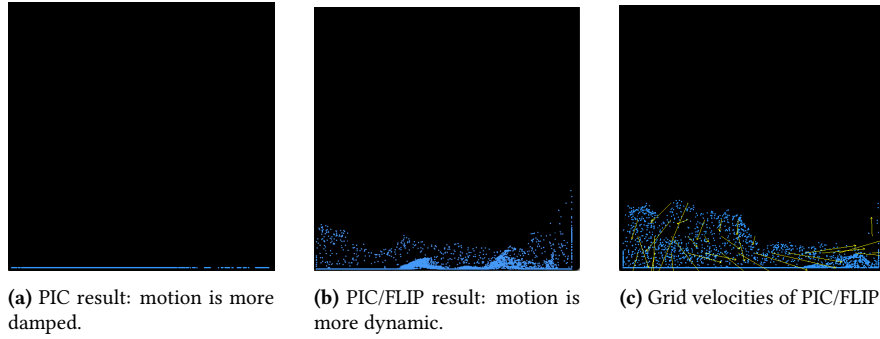


Figure 3. Final particle positions using PIC and PIC/FLIP. Both start from the same initial state, but show different behavior due to how velocity is transferred.

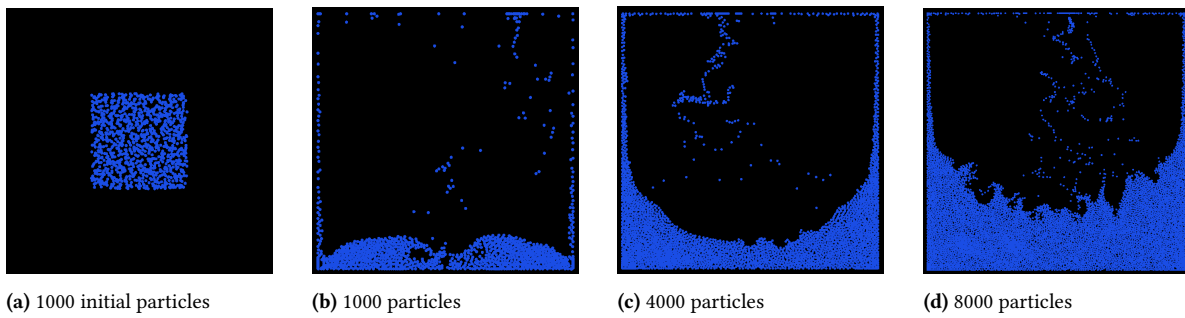


Figure 4. Comparison of APIC simulation results with increasing particle counts. (a) shows the initial particle configuration, where all particles are placed in the center of the domain. (b)–(d) show the simulation at the moment particles start to fall under gravity.